

## **Atmos InterCombi HE32**



HEATING SYSTEMS

The solar compatible Atmos InterCombi HE32 is the ultimate space saving, durable combi boiler. It will warm your home and give you all the hot water you need.



### Warmth is comfort

Whatever the weather, the InterCombi gives energy efficient comfort. Carefully matching the heat to your needs, with an endless supply of piping hot water whenever you need it.



#### Reliable

The InterCombi is durable with a life expectancy of well over twenty years. Parts that need servicing have easy access. Frost protection is built in, so even in those winter days your InterCombi gives you peace of mind.




## Ready for the future

This boiler can be linked to solar hot water systems such as the Atmos EasySolar, and integrated with other renewable energy systems. You can also take advantage of smart heating controls that improve room comfort and increase efficiency.



#### You choose

Suitable for use with modern underfloor heating or fully compatable with your radiators. Our versatile flue range also means you can find the perfect place to fit your boiler

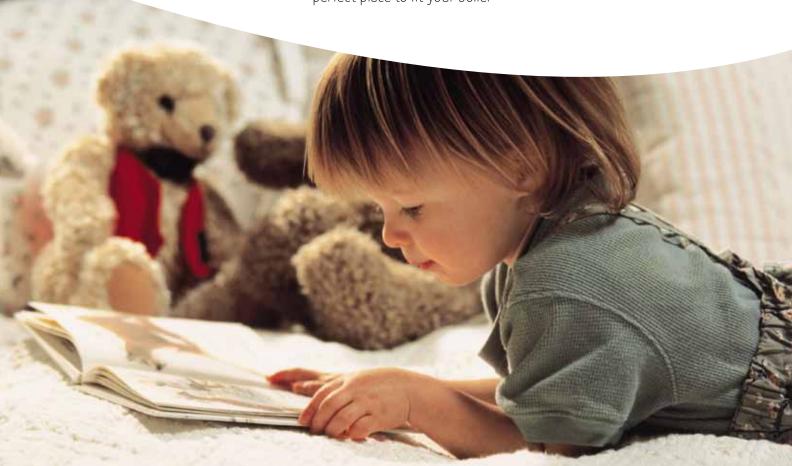

# **More information...**

- 🗱 **Solar compatible**, can receive pre heated water at temperatures up to 85°c
- **Fuel efficient**, soft start and fully modulating burner gives very efficient and quiet operation
- **Condensing efficiency** operates for both heating and hot water production
- **Mot water** is available with a "Keep Hot" facility which has a self-learning "Eco" timer
- Flow temperature can be set as low as 35°c, making it ideal for underfloor heating systems
- Flue kits available for all types of installation make siting the boiler easy

- **Ease of installation,** the boiler can be set to supply domestic hot water only, whilst work can continue on the heating circuit.
- **Future extensions**, no need to replace boiler, a hot water cylinder can be added
- Control board has connections for low or high voltage and is protected from accidental damage by a splash proof drip tray
- **Electricity consumption** is dramatically reduced as the boiler does not require the pump to operate for domestic hot water. Standby losses are almost zero

## Any questions? Please contact us:

sales@atmos.co.uk atmos.co.uk

t: 01327 871 990 Atmos Heating Systems West March Daventry Northants NN114SA



	,
Central Heating	InterCombi HE32 Plus Boiler
Heat output range condensing mode	7.7 - 26.8kW (91,500 Btu/hr)
Heat output range non-condensing	7.0 - 26.2kW
mode	
SAP annual efficiency 2005/2009	90.1/88.9%
Expansion Vessel Capacity	6 litres
Domestic Hot Water	
Heat output (maximum)	31.5kW (107,500 Btu/hr)
Flow rate at 35°c rise (45°c outlet)	12.5 litres/min
Flow rate minimum	2 litres/min
Other Data	
Weight (Dry)	39kg
Dimensions	450mm W x 270mm D x H 810mm
Warranty	2 years (parts & labour)
*terms and conditions apply	10 years Heat Exchanger (parts)

