


Kcal = Watt x 0.860 BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.238
 Watt Δt 40° = Watt Δt 50° x 0.770
 Watt Δt 30° = Watt Δt 50° x 0.550
 Watt Δt 20° = Watt Δt 50° x 0.342



p max = 10.0 bar

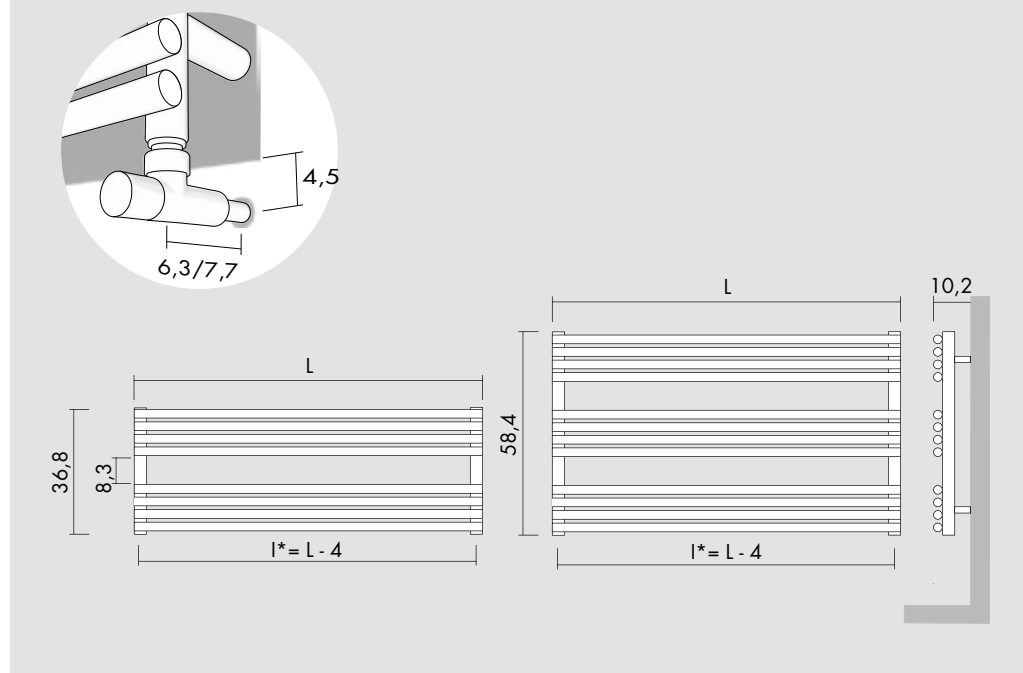

H cm	L cm	I* cm	art*	[B] STOCK	Lt*	watt Δt 30°	watt Δt 50°
36.8	120.0	116.0	BD25S120036	STOCK	5.4	263	479
36.8	140.0	136.0	BD25S140036	STOCK	6.2	307	559
36.8	160.0	156.0	BD25S160036	STOCK	7.0	351	639
58.4	120.0	116.0	BD25S120058	STOCK	8.2	395	719
58.4	140.0	136.0	BD25S140058	STOCK	9.4	461	838
58.4	160.0	156.0	BD25S160058	STOCK	10.5	527	958

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

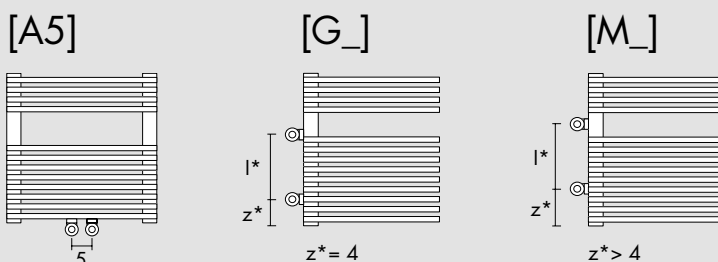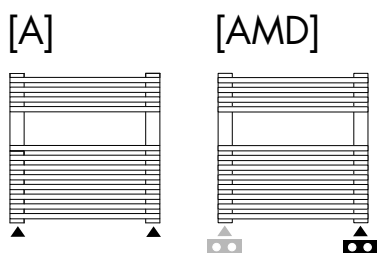

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
 Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
 Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

Optional




Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra

[BIAN] **E12SQB**
 [CROM] **E12SQR**




Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**




Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo

[BIAN] **C5B**
 [CROM] **C5R**



$\varnothing \leq 16$ mm
 [BIAN] **CTB**
 [CROM] **CTR**
 $16 \text{ mm} < \varnothing < 24$ mm
 [BIAN] **CWB**
 [CROM] **CWR**



Towel hooks
 Paire de patère
 Crochet das Bugel
 Percha
 [CROM] **BA25R**
 [COLOUR] **BA25C**
 [GOLD] **BA25G**

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página