



Ai vertici della qualità

Design essenziale, minimo ingombro, elevate prestazioni: TOP si inserisce facilmente in ogni ambiente, anche negli spazi più ridotti, grazie alla sua forma compatta e ai moduli completamente lisci e senza spigoli. TOP è il risultato di una scrupolosa ricerca tecnologica, espressa nell'uniformità della composizione della lega, nella tecnica di pressofusione, nella doppia verniciatura, negli accurati controlli di ogni fase produttiva. Per raggiungere i più alti livelli di funzionalità e affidabilità.

Peak quality

Essential design, minimal space, optimal performance: TOP is easy to adapt in all environments, even in the smallest spaces, thanks to its compact shape and completely smooth and edge-free modules. TOP is the result of thorough technological research, expressed in its alloy composition uniformity, die casting technique, double painting and accurate checks of each production phase. To reach the highest levels of functionality and reliability.

MADE IN ITALY



High pressure



Informazioni tecniche / Technical informations

	altezza height (mm)	interasse centres (mm)	profondità thickness (mm)	larghezza width (mm)	H2O water capacity (lt)	peso weight (kg)	pressione esercizio operative pressure (bar)	resa termica dT 50 thermal power		n	Km
								(W)	(kcal/h)		
TOP 350	425	350	80	80	0,26	0,93	20	80	69	1,2886	0,5187
TOP 500	574	500	80	80	0,29	1,19	20	105	90	1,2968	0,6570
TOP 600	675	600	80	80	0,34	1,37	20	121	104	1,3040	0,7384
TOP 700	774	700	80	80	0,49	1,80	6	152	131	1,3410	0,7696
TOP 800	875	800	80	80	0,54	1,97	6	166	143	1,3610	0,8118


Equazione caratteristica: $\phi = K \cdot \Delta T^n$. Valori di potenza termica misurati presso il Politecnico di Milano secondo la norma EN442. Per un corretto funzionamento del radiatore è consigliabile l'uso di una valvola di sfogo aria e di non isolare mai la batteria dall'impianto, chiudendone le valvole. Ricordiamo inoltre che la garanzia è valida per una pressione di esercizio 20 bar per i modelli 35, 50, 60 e 6 bar per i restanti modelli e una temperatura massima d'esercizio di 120°. Mozzo Ø: 1"

Characteristic Equation: $\phi = K \cdot \Delta T^n$. Thermal power values measured at the Milan Polytechnic in accordance with the EN442 norm. In order for the radiator to function correctly, it is recommended that you use an automatic valve with an air vent and that you never isolate the battery from the installation by closing its valves. We remind you also that the guarantee is valid for a maximum operating pressure of 20 bar 35,50,60 (depth 80) and 6 bar for 70 and 80 and a maximum operating temperature of 120°. Hub Ø: 1"

Connessioni / Joints

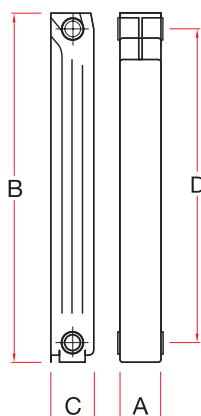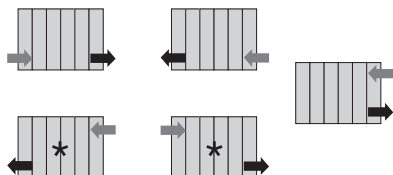

Indicazioni per il montaggio / Assembly instructions

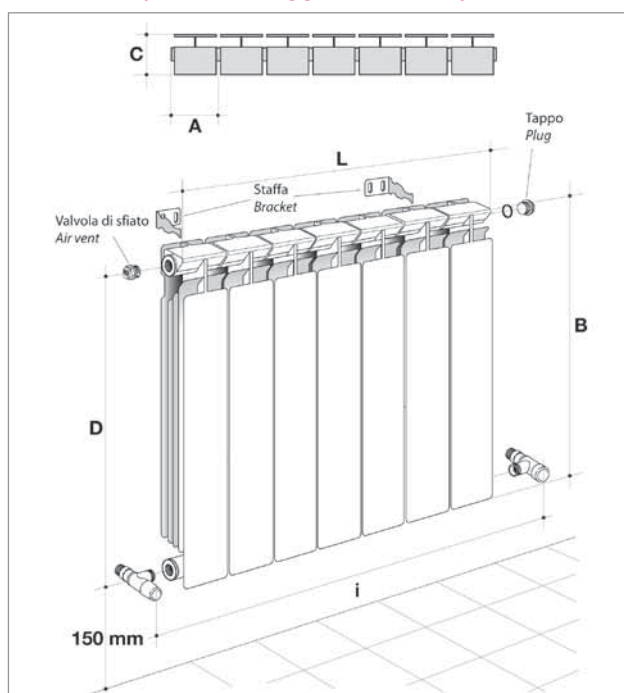

* Applicazione Consigliata / recommended application

Modello / Model	A mm	B mm	C mm	D mm
TOP 350	80	425	80	350
TOP 500	80	574	80	500
TOP 600	80	657	80	600
TOP 700	80	775	80	700
TOP 800	80	875	80	800

$L = A \times n^\circ \text{ elementi} / A \times \text{no. elements}$
 $i = L + 90 \text{ mm (standard)}$



Bassa temperatura / Low temperature

ΔT	Coef.	ΔT	Coef.	ΔT	Coef.	ΔT	Coef.
25	0,401	39	0,720	53	1,080	67	1,471
26	0,422	40	0,745	54	1,107	68	1,501
27	0,443	41	0,770	55	1,134	69	1,530
28	0,465	42	0,794	56	1,161	70	1,559
29	0,487	43	0,820	57	1,189	71	1,588
30	0,510	44	0,845	58	1,216	72	1,618
31	0,532	45	0,870	59	1,244	73	1,648
32	0,555	46	0,896	60	1,272	74	1,678
33	0,578	47	0,922	61	1,300	75	1,708
34	0,601	48	0,948	62	1,328	76	1,738
35	0,625	49	0,974	63	1,357	77	1,768
36	0,648	50	1,000	64	1,385	78	1,798
37	0,672	51	1,026	65	1,414	79	1,829
38	0,696	52	1,053	66	1,443	80	1,859

Listino prezzi / Price list

code	modello / model	N. el.	altezza / height (mm)	interasse / centres (mm)	larghezza / width (mm)	potenza / thermal power watt Kcal/h		€
6000424	TOP 350 x 4 el.	4	425	350	320	320	275	-
6000425	TOP 350 x 5 el.	5	425	350	400	400	344	-
6000426	TOP 350 x 6 el.	6	425	350	480	480	413	-
6000427	TOP 350 x 7 el.	7	425	350	560	560	482	-
6000428	TOP 350 x 8 el.	8	425	350	640	640	550	-
6000429	TOP 350 x 9 el.	9	425	350	720	720	619	-
6000430	TOP 350 x 10 el.	10	425	350	800	800	688	-
6000431	TOP 350 x 11 el.	11	425	350	880	880	757	-
6000432	TOP 350 x 12 el.	12	425	350	960	960	826	-
6004425	TOP 500 x 4 el.	4	573	500	320	420	361	-
6004426	TOP 500 x 5 el.	5	573	500	400	525	452	-
6004427	TOP 500 x 6 el.	6	573	500	480	630	542	-
6004428	TOP 500 x 7 el.	7	573	500	560	735	632	-
6004429	TOP 500 x 8 el.	8	573	500	640	840	722	-
6004430	TOP 500 x 9 el.	9	573	500	720	945	813	-
6004431	TOP 500 x 10 el.	10	573	500	800	1050	903	-
6004432	TOP 500 x 11 el.	11	573	500	880	1155	993	-
6004433	TOP 500 x 12 el.	12	573	500	960	1260	1084	-
6014545	TOP 600 x 4 el.	4	675	600	320	484	416	-
6014546	TOP 600 x 5 el.	5	675	600	400	605	520	-
6014547	TOP 600 x 6 el.	6	675	600	480	726	624	-
6014548	TOP 600 x 7 el.	7	675	600	560	847	728	-
6004688	TOP 600 x 8 el.	8	675	600	640	968	832	-
6014549	TOP 600 x 9 el.	9	675	600	720	1089	937	-
6014550	TOP 600 x 10 el.	10	675	600	800	1210	1041	-
6014551	TOP 600 x 11 el.	11	675	600	880	1331	1145	-
6014552	TOP 600 x 12 el.	12	675	600	960	1452	1249	-
6000318	TOP 700 x 4 el.	4	775	700	320	608	523	-
6000319	TOP 700 x 5 el.	5	775	700	400	760	654	-
6000320	TOP 700 x 6 el.	6	775	700	480	912	784	-
6000321	TOP 700 x 7 el.	7	775	700	560	1064	915	-
6000322	TOP 700 x 8 el.	8	775	700	640	1216	1046	-
6000323	TOP 700 x 9 el.	9	775	700	720	1368	1176	-
6000324	TOP 700 x 10 el.	10	775	700	800	1520	1307	-
6000325	TOP 700 x 11 el.	11	775	700	880	1672	1438	-
6000326	TOP 700 x 12 el.	12	775	700	960	1824	1569	-
6000282	TOP 800 x 4 el.	4	875	800	320	664	571	-
6000283	TOP 800 x 5 el.	5	875	800	400	830	714	-
6000284	TOP 800 x 6 el.	6	875	800	480	996	857	-
6000285	TOP 800 x 7 el.	7	875	800	560	1162	999	-
6000286	TOP 800 x 8 el.	8	875	800	640	1328	1142	-
6000287	TOP 800 x 9 el.	9	875	800	720	1494	1285	-
6000288	TOP 800 x 10 el.	10	875	800	800	1660	1428	-
6000289	TOP 800 x 11 el.	11	875	800	880	1826	1570	-
6000290	TOP 800 x 12 el.	12	875	800	960	1992	1713	-