





ZAROS V75

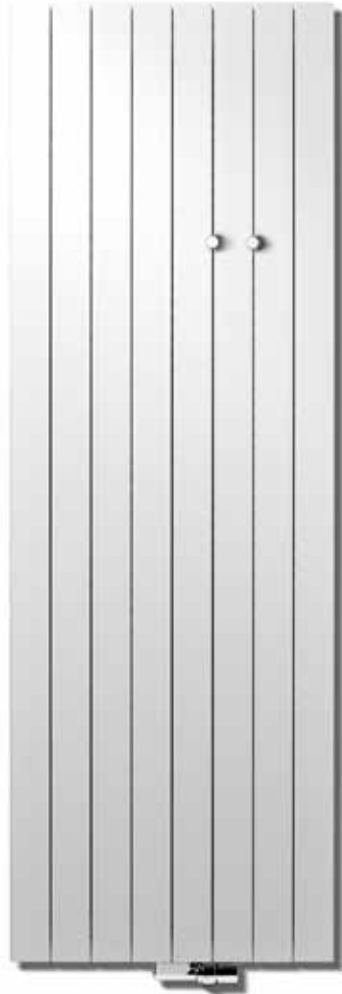

ZAROS V100



ref. nr. 118210300000099
price £ 146
Fittings, see p. 193

- TYPES**
- Vertical: Zaros V75 and Zaros V100 (depth)

- COLOURS**
- Standard colour S600 (fine texture white)
 - Not available in other colours

- SPECIAL**
- Composed out of vertical aluminium profiles
 - Protection against internal corrosion: protecting product Protect 1+1 (see p. 195)

- BRACKETS**
- Wall brackets standard

- TECHNICAL**
- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
 - KTL priming coat, powder coating
 - Standard operating pressure: 10 bar
 - Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)


Pure electrical radiator prefilled	✗
Mixed radiator	✗

CONNECTION

One-point connection for one-pipe system	✗
One-point connection for two-pipe system	✗
Two-point connection for one-pipe system (connection by way of the central connection) (see p. 186)	✓
Two-point connection for two-pipe system (standard) (see p. 186)	✓
Integrated valve	✗

- A standard automatic air vent is fitted on the top left hand side of the radiator
- **Attention: The water should be PH neutral. Protect 1+1 or a similar product should be added to the circuit (1 liter for 100 liters installation water).**

- DELIVERY TERMS** Transport duration not included !
- Stock radiators in white (S600): 5 working days
 - Non-stock radiators: 15 to 30 working days, dependent on the type of radiator

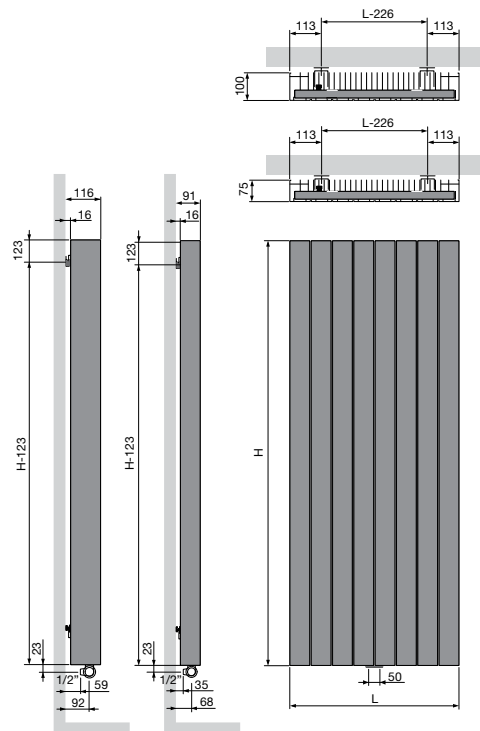

type	width (L mm)	height (H mm)	75/65/20* Watt	55/45/20* (Watt)	n-exp.	weight (kg)	water content (l)	tubes (n)	price S600	electr. resistance (Watt)
REF. NR. 11247 ZAROS V75	375	1600	1159	594	1,31	16,50	1,38	-	535	-
	375	1800	1281	656	1,31	18,48	1,44	-	567	-
	375	2000	1403	719	1,31	20,45	1,50	-	582	-
	375	2200	1502	773	1,30	22,40	1,65	-	621	-
	450	1600	1377	687	1,36	19,57	1,57	-	624	-
	450	1800	1518	770	1,33	21,84	1,69	-	661	-
	450	2000	1659	850	1,31	24,12	1,82	-	680	-
	450	2200	1765	909	1,30	26,55	2,00	-	727	-
	525	1600	1594	780	1,40	22,63	1,76	-	711	-
	525	1800	1755	876	1,36	25,21	1,95	-	757	-
	525	2000	1915	981	1,31	27,78	2,13	-	779	-
	525	2200	2027	1049	1,29	30,70	2,35	-	833	-
	600	1600	1812	868	1,44	25,70	1,95	-	800	-
	600	1800	1991	984	1,38	28,58	2,20	-	853	-
	600	2000	2171	1106	1,32	31,45	2,45	-	877	-
	600	2200	2289	1184	1,29	34,85	2,70	-	939	-
REF. NR. 11246 ZAROS V100	375	1600	1352	696	1,30	18,85	1,25	-	594	-
	375	1800	1490	763	1,31	21,50	1,40	-	630	-
	375	2000	1625	836	1,30	23,30	1,60	-	648	-
	375	2200	1757	904	1,30	25,70	1,65	-	689	-
	450	1600	1607	827	1,30	22,38	1,48	-	693	-
	450	1800	1771	902	1,32	25,38	1,68	-	736	-
	450	2000	1931	989	1,31	27,75	1,95	-	757	-
	450	2200	2088	1075	1,30	30,52	2,00	-	808	-
	525	1600	1859	952	1,31	25,92	1,72	-	791	-
	525	1800	2049	1039	1,33	29,27	1,97	-	841	-
	525	2000	2235	1145	1,31	32,20	2,30	-	866	-
	525	2200	2417	1244	1,30	35,33	2,35	-	925	-
	600	1600	2110	1081	1,31	29,45	1,95	-	889	-
	600	1800	2326	1173	1,34	33,15	2,25	-	948	-
	600	2000	2536	1299	1,31	36,65	2,65	-	975	-
	600	2200	2742	1411	1,30	40,15	2,70	-	1044	-

CE 09 in conformity with EN442-1: radiators and convectors

For the heat delivery of other systems, please visit our website: www.vasco.eu

STOCK RADIATORS (S600)

type	width (L mm)	height (H mm)	colour	short ref. nr.	price
ZAROS V75	525	1800	0600	11247-01	757
	600	2000	0600	11247-02	877
ZAROS V100	525	1800	0600	11246-01	841
	600	2000	0600	11246-02	975



ZAROS H100

TYPES

- Horizontal: Zaros H100 (depth)

COLOURS

- Standard colour S600 (fine texture white)
- Not available in other colours

SPECIAL

- Composed out of vertical aluminium profiles
- Protection against internal corrosion: protecting product Protect 1+1 (see p. 195)
- Zaros H100(-V) also available as toilet radiator (450 x 400 mm and 450 x 500 mm)

BRACKETS

- Wall brackets standard

TECHNICAL

- Aluminium radiators are manufactured by way of a patented press process that goes into making a world class radiator.
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

Pure electrical radiator prefilled	✗
Mixed radiator	✗

CONNECTION


One-point connection for one-pipe system	✗
One-point connection for two-pipe system	✗
Two-point connection for one-pipe system	✗
Two-point connection for two-pipe system (standard) (see p. 186)	✓
Integrated valve (extra charge) (order as special radiator) (see p. 188)	✓

- A standard automatic air vent is fitted on the top left hand side of the radiator
- Attention: The water should be PH neutral. Protect 1+1 or a similar product should be added to the circuit (1 liter for 100 liters installation water).**


DELIVERY TERMS Transport duration not included !

- 15 to 30 working days, dependent on the type of radiator

ZAROS H100

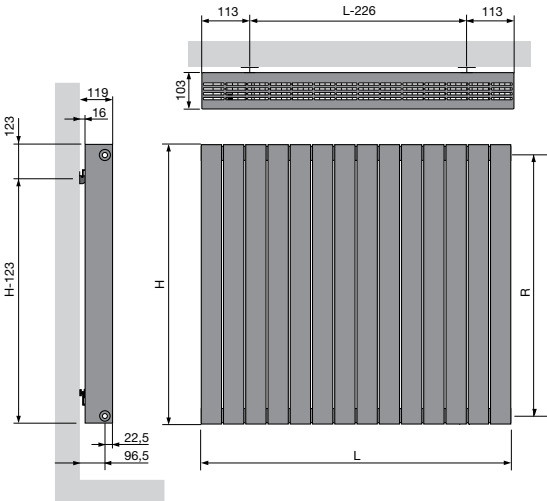

ZAROS H100 (INTEGRATED VALVE)

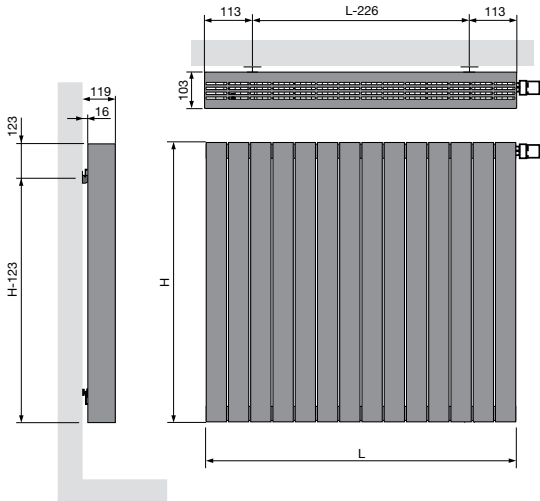

ZAROS H100					
Centre between the lateral connections 23/67 (R)	338,5	438,5	538,5	838,5	1338,5
Height (H)	400	500	600	900	1400
Centre between the brackets	L-226				

type	width (L mm)	height (H mm)	75/65/20* Watt	55/45/20* (Watt)	n-exp.	weight (kg)	water content (l)	tubes (n)	price S600	electr. resistance (Watt)
REF. NR. 11245 ZAROS H100	450	400	452	233	1,30	6,66	0,48	-	349	-
	450	500	567	290	1,31	7,92	0,66	-	368	-
	450	600	666	343	1,30	9,24	0,78	-	390	-
	450	900	960	494	1,30	13,14	0,96	-	456	-
	450	1400	1391	709	1,32	20,30	1,38	-	564	-
	525	400	527	271	1,30	7,77	0,56	-	381	-
	525	500	662	339	1,31	9,24	0,77	-	401	-
	525	600	778	400	1,30	10,78	0,91	-	426	-
	525	900	1120	577	1,30	15,33	1,12	-	502	-
	525	1400	1614	822	1,32	23,70	1,57	-	628	-
	600	500	756	387	1,31	10,56	0,88	-	434	-
	600	600	889	458	1,30	12,32	1,04	-	462	-
	600	900	1280	659	1,30	17,52	1,28	-	549	-
	600	1400	1835	935	1,32	27,10	1,75	-	693	-
	675	400	678	349	1,30	9,99	0,72	-	443	-
	675	500	851	436	1,31	11,88	0,99	-	466	-
	675	600	1000	515	1,30	13,86	1,17	-	500	-
	675	900	1440	741	1,30	19,71	1,44	-	596	-
	750	400	753	388	1,30	11,10	0,80	-	475	-
	750	500	945	484	1,31	13,20	1,10	-	501	-
	750	600	1111	572	1,30	15,40	1,30	-	535	-
	750	900	1600	824	1,30	21,90	1,60	-	642	-
	825	400	828	426	1,30	12,21	0,88	-	506	-
	825	500	1040	533	1,31	14,52	1,21	-	533	-
	825	600	1222	629	1,30	16,94	1,43	-	572	-
	825	900	1760	906	1,30	24,09	1,76	-	689	-
	900	400	904	465	1,30	13,32	0,96	-	537	-
	900	500	1134	581	1,31	15,84	1,32	-	565	-
	900	600	1333	686	1,30	18,48	1,56	-	608	-
	900	900	1920	988	1,30	26,28	1,92	-	735	-
	975	400	979	504	1,30	14,43	1,04	-	568	-
	975	500	1229	629	1,31	17,16	1,43	-	599	-
	975	600	1444	743	1,30	20,02	1,69	-	645	-
	975	900	2080	1071	1,30	28,47	2,08	-	782	-
	1050	400	1054	543	1,30	15,54	1,12	-	601	-
	1050	500	1323	678	1,31	18,48	1,54	-	631	-
	1050	600	1555	800	1,30	21,56	1,82	-	681	-
	1050	900	2240	1153	1,30	30,66	2,24	-	829	-
	1125	400	1130	582	1,30	16,65	1,20	-	631	-
	1125	500	1418	726	1,31	19,80	1,65	-	665	-
	1125	600	1666	858	1,30	23,10	1,95	-	718	-
	1125	900	2400	1235	1,30	32,85	2,40	-	876	-
	1200	500	1512	774	1,31	21,12	1,76	-	698	-
	1200	600	1777	915	1,30	24,64	2,08	-	753	-
	1200	900	2560	1318	1,30	35,04	2,56	-	922	-
	1350	500	1701	871	1,31	23,76	1,98	-	763	-
	1350	600	1999	1029	1,30	27,72	2,34	-	827	-
	1350	900	2880	1482	1,30	39,42	2,88	-	1016	-
	1500	400	1506	775	1,30	22,20	1,60	-	788	-
	1500	500	1890	968	1,31	26,40	2,20	-	830	-
	1500	600	2222	1144	1,30	30,80	2,60	-	900	-
	1500	900	3200	1647	1,30	43,80	3,20	-	1110	-
	1650	400	1657	853	1,30	24,42	1,76	-	851	-
	1650	500	2079	1065	1,31	29,04	2,42	-	896	-
	1650	600	2444	1258	1,30	33,88	2,86	-	972	-
	1650	900	3519	1811	1,30	48,18	3,52	-	1203	-
	1800	400	1807	930	1,30	26,64	1,92	-	914	-
	1800	500	2268	1162	1,31	31,68	2,64	-	962	-
	1800	600	2666	1372	1,30	36,96	3,12	-	1045	-
	1800	900	3839	1976	1,30	52,56	3,84	-	1296	-
	1950	500	2457	1258	1,31	34,32	2,86	-	1027	-
	1950	600	2888	1487	1,30	40,04	3,38	-	1118	-
	1950	900	4159	2141	1,30	56,94	4,16	-	1389	-
	2550	400	2560	1318	1,30	37,74	2,72	-	1228	-
	2850	400	2861	1473	1,30	42,18	3,04	-	1409	-


CE 09 in conformity with EN442-1: radiators and convectors

For the heat delivery of other systems, please visit our website: www.vasco.eu


ACCESSORIES		COLOUR	REF.NR.	£
ZAROS V75 / ZAROS V100 / ZAROS H100				
HOOK O-RING		CHROME	118360400000099	27
		• h = 22 mm; b = 22 mm; d = 42 mm		
ZAROS V75 / ZAROS V100 / ZAROS H100				
HOOK WITH A WIDE GROOVE		CHROME	118340700000099	27
		• h = 22 mm; b = 22 mm; d = 42 mm		
ZAROS V75 / ZAROS V100 / ZAROS H100				
TOWEL RAIL		CHROME	118323800000099	117
		• h = 22 mm; b = 720 mm (easy adjustable) d = 75 mm; a = 56 mm		

d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator


ZAROS VERTICAL: ZAROS V75 / ZAROS V100



ZAROS HORIZONTAL: ZAROS H100

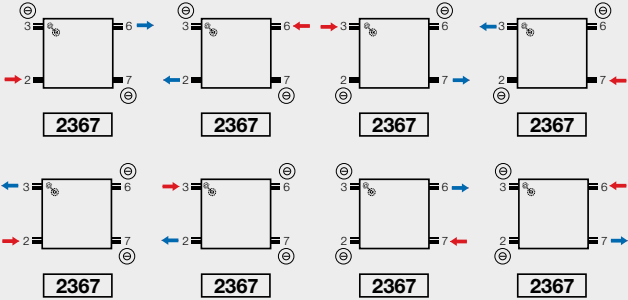

ZAROS HORIZONTAL: ZAROS H100
INTEGRATED VALVE



- Attention: the supply is always on the right side of the radiator!

Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.