


PRO



- Caldaia smaltata
- Anodo di magnesio
- Elevata precisione di regolazione
- Termostato ad alta sensibilità

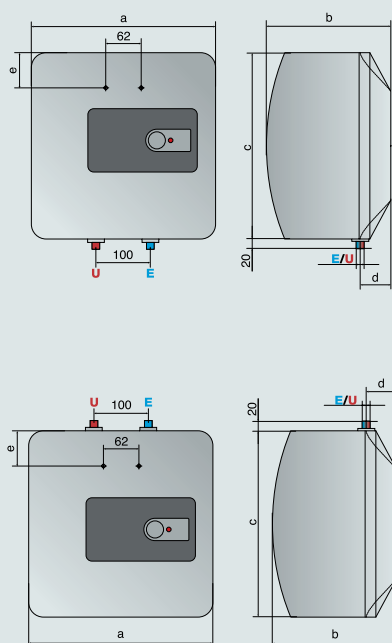

LEGENDA

- E** Entrata acqua fredda G 1/2"
- U** Uscita acqua calda G 1/2"

DATI TECNICI

		10 R/3	10 ST R/3	15 R/3	15 ST R/3	30 R/3
Capacità	l	10	10	15	15	30
Potenza	kW	1,200	1,200	1,200	1,200	1,500
Voltaggio	V	230	230	230	230	230
Tempo di riscald. (ΔT= 45°C)	h, min.	0,30	0,30	0,45	0,45	1,10
Temp. max d'esercizio	°C	80	80	80	80	80
Dispersione termica a 65°C	kWh/24h	0,43	0,55	0,53	0,65	0,61
Pressione max d'esercizio	bar	8	8	8	8	8
Peso netto	kg	6,6	6,6	7,5	7,5	10,4
Protezione	IP	X1	X1	X1	X1	X1

DIMENSIONI DI INGOMBRO

A mm	360	360	360	360	446
B mm	254	254	300	300	360
C mm	360	360	360	360	446
D mm	92	92	78	78	115
E mm	144	144	144	144	165

MODELLO	PRO 10 R/3	PRO 10 ST R/3	PRO 15 R/3	PRO 15 ST R/3	PRO 30 R/3
CODICI	3100216	3100217	3100218	3100219	3100220